

Purus Line Vinyl Plus



Advantages

- Screwed grating in one piece, Torx T25 (lock set included).
- Channel drain is a single ABS piece for better adhesion.
- Clamping ring in 2 mm stainless steel with 2 mm EPDM gasket.
- Grating in stylish pattern and NOOD water trap included (mechanical odour plug in water trap).
- Approved by RISE.
- Minimum installing height 73 mm.
- Available in lengths 600, 700, 800, 900 and 1,000 mm.

The vinyl flooring provides an easy-to-clean watertight surface. With Purus Line Vinyl Plus, you create an elegant yet practical impression.

The new chessboard-pattern grating has no joints where dirt can accumulate. The grating is loosened by means of the recessed torx screws. Easy to clean and maintain, but safe.

Screwed clamping frame in 2 mm stainless steel provides a safe, watertight connection to the vinyl flooring.

Available with various outlet dimensions and directions.


Gently rounded corners and low seat for optimal connection of vinyl flooring.

Accessories

- Purus supporting leg for concrete joist included.
- Installation set for wooden joist is optional.



Outlet houses

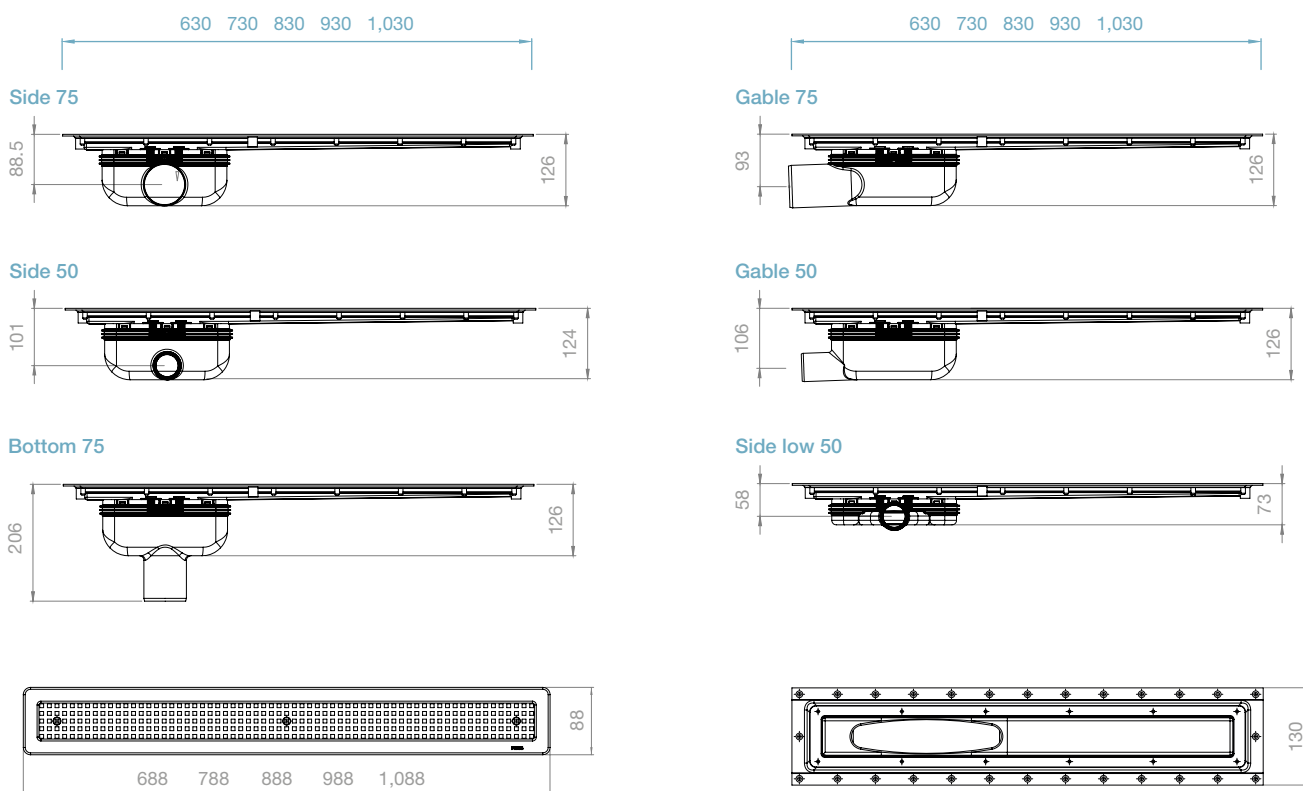

Name	min. flow* litres/sec.	600 mm	700 mm	800 mm	900 mm	1,000 mm
Ø75 side	0.8	RSK 711 07 47	RSK 711 07 52	RSK 711 07 57	RSK 711 07 62	RSK 711 07 67
Ø50 side	0.8	RSK 711 07 44	RSK 711 07 49	RSK 711 07 54	RSK 711 07 59	RSK 711 07 64
Ø75 base	0.8	RSK 710 37 57	RSK 710 37 58	RSK 710 37 59	RSK 710 37 60	RSK 710 37 61
Ø75 gable	0.8	RSK 711 07 48	RSK 711 07 53	RSK 711 07 58	RSK 711 07 63	RSK 711 07 68
Ø50 gable	0.8	RSK 711 07 46	RSK 711 07 51	RSK 711 07 56	RSK 711 07 61	RSK 711 07 66
Ø50 side low**	0.6	RSK 711 07 45	RSK 711 07 50	RSK 711 07 55	RSK 711 07 60	RSK 711 07 65

*as per SS-EN 1253-1, ** Concrete only

Our continual product development may result in changes to finish, design and construction, which we reserve the right to.



Purus is
ISO 9001 certified

Purus AB
info@purus.se
www.purus.se