


RSK 7129928

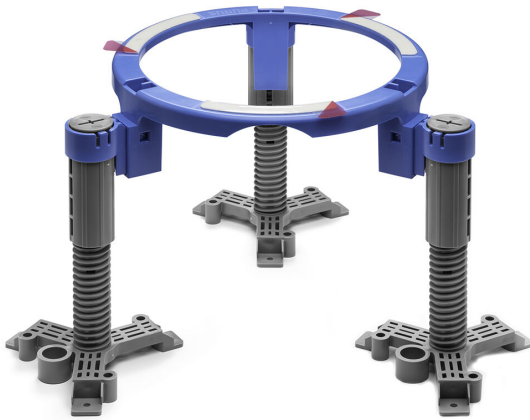

The Midgård installation support must always be used when installing Purus floor drains into concrete floors. The Midgård support ensures that the installation meets the recommended tolerance requirements of +/- 2mm for floor drain installations, according to current industry guidelines. The legs are set for an installation height of 172mm; but can also be adjusted from 82mm to 230mm. The support feet have four different installation options: nail gun and washer; screw and plug; nail plug; EPS fastener and nail; or alternatively can be fixed and fastened. The Midgård support is designed to fit all plastic, stainless steel and cast iron Purus floor drains with a grate diameter of 130mm and 150mm, as well as gullies in the S-Series. For installation of the Saga and Rot floor drains, the Bifrost support is recommended.

Specifications

The Midgård installation support must always be used when installing Purus floor drains into concrete floors. The Midgård support ensures that the installation meets the recommended tolerance requirements of +/- 2mm for floor drain installations, according to current industry guidelines. The legs are set for an installation height of 172mm; but can also be adjusted from 82mm to 230mm. The support feet have four different installation options: nail gun and washer; screw and plug; nail plug; EPS fastener and nail; or alternatively can be fixed and fastened. The Midgård support is designed to fit all plastic, stainless steel and cast iron Purus floor drains with a grate diameter of 130mm and 150mm, as well as gullies in the S-Series. For installation of the Saga and Rot floor drains, the Bifrost support is recommended.

RSK Number

7129928

Floor

Concrete flooring

Construction**Function**

For installation in concrete floor

Item Color

Grey

Material

ABS, PP

Version

Adjustable height