

RSK 7099506

Outlet gully untrapped in acid-resistant stainless steel with Ø75 side outlet and Ø110 connection to the drainage channel.

RSK 7099506

Outlet gully untrapped in acid-resistant stainless steel with Ø75 side outlet and Ø150 connection to the drainage channel.

RSK 7099517

Outlet gully untrapped in acid-resistant stainless steel with Ø75 side outlet and Ø220 connection to the drainage channel.

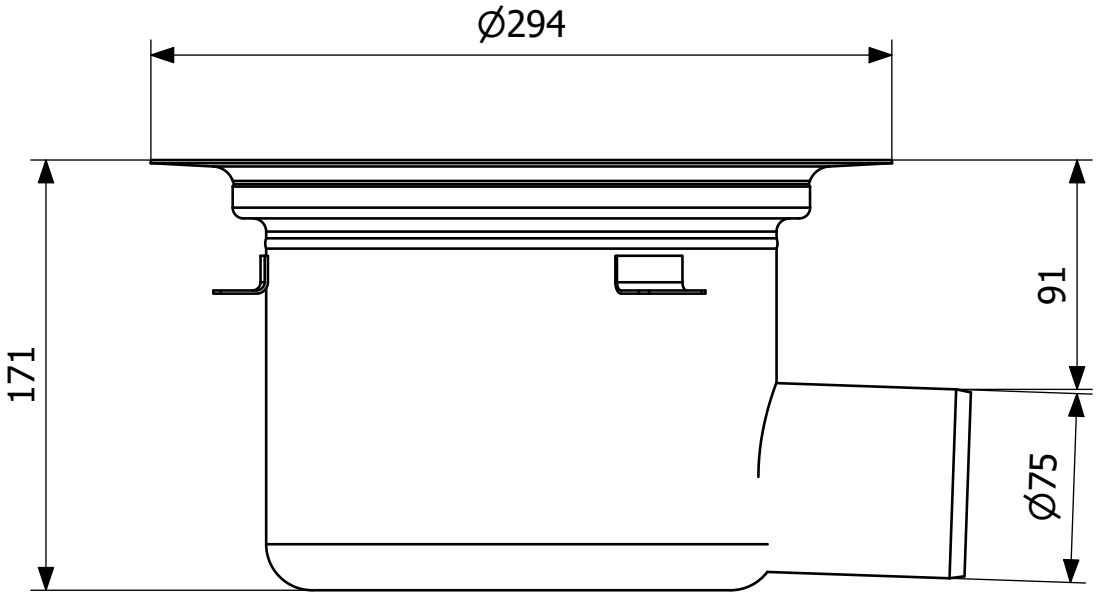
## Specifications

| | |
|---|---|
| **RSK Number** | 7099506 |
| **Dimension** | Ø75 mm |
| **Function** | Side outlet |
| **Item Color** | Stainless |
| **Material** | Acid-resistant stainless steel 1.4404 |
| **Pressure Flow Temp** | 3,6 l/s |
| **Size** | Ø110 mm |
| **Surface** | Cold rolled (2B) |

| | |
|---|---|
| **Version** | Untrapped |

| | |
|---|---|
| **Item Number** | HA305405PR |
| **Dimension** | Ø75 mm |
| **Function** | Side outlet |
| **Item Color** | Stainless |
| **Material** | Acid-resistant stainless steel 1.4404 |
| **Size** | Ø150 mm |
| **Surface** | Cold rolled (2B) |
| **Version** | Untrapped |

| | |
|---|---|
| **RSK Number** | 7099517 |
| **Dimension** | Ø75 mm |
| **Function** | Side outlet |
| **Item Color** | Stainless |
| **Material** | Acid-resistant stainless steel 1.4404 |
| **Pressure Flow Temp** | 5,2 l/s |
| **Size** | Ø220 mm |
| **Surface** | Cold rolled (2B) |
| **Version** | Untrapped |


∅294
171
91
∅75