

RSK 7138440

Safe Overflow for tiled floors with gluing flange has a 50mm vertical outlet and is adapted for unintentional overflow of water. The Safe Overflow for tiles with gluing flange comes with a removable automatic odour stop and clamping ring. The automatic odour stop prevents any bad odours from escaping through the drainage system, even if it is dried out. The overflow must not be used as an ordinary floor drain, but can be placed underneath a sink, a kitchen ice maker or similar.

RSK 7138445

Safe Overflow for tiled floors has a 50mm vertical outlet and is adapted for unintentional overflow of water. The Safe Overflow for tiles comes with a removable automatic odour stop and clamping ring. The automatic odour stop prevents any bad odours from escaping through the drainage system, even if it is dried out. The overflow must not be used as an ordinary floor drain, but can be placed underneath a sink, a kitchen ice maker or similar.

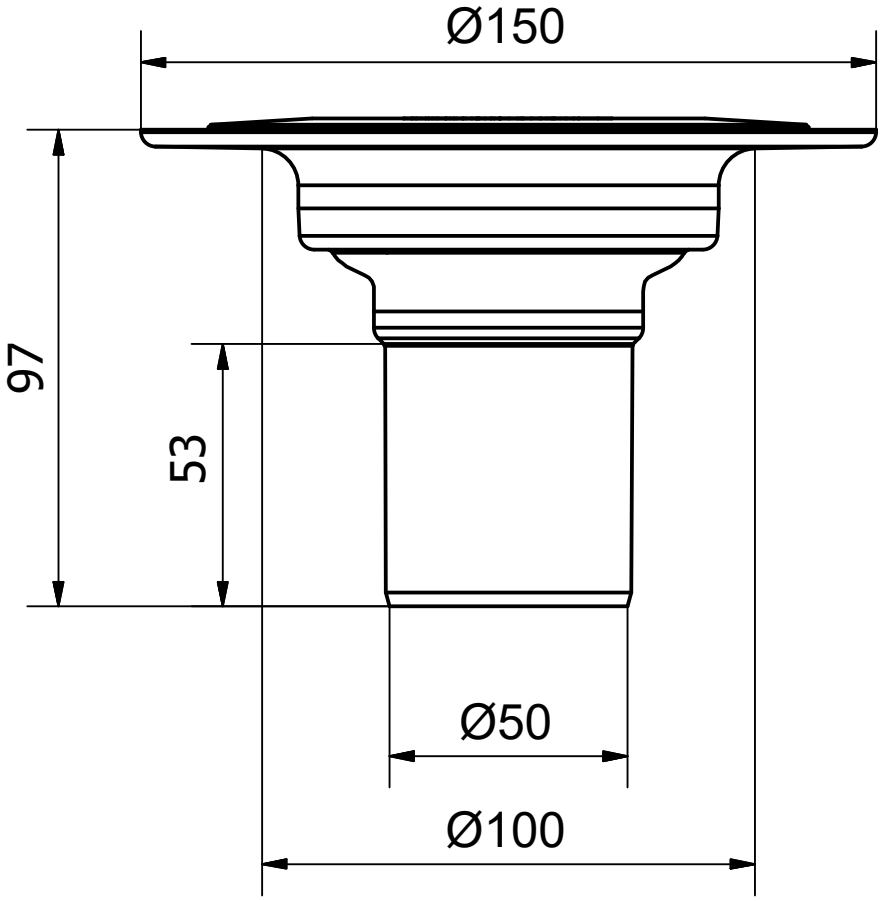
The automatic clamping ring is used for both sealing membrane and vinyl flooring. It is a self-adjusting clamping ring for vinyl flooring with a thickness of 1,5 mm to 2 mm.

Specifications

| | |
|---|---|
| **RSK Number** | 7138440 |
| **Dimension** | Ø50 mm |

| | |
|---|---|
| **Floor Construction** | Concrete flooring |
| **Floor Covering** | Tile floor with glueing flange |
| **Function** | Bottom outlet |
| **Item Color** | White |
| **Material** | PP, Stainless steel 1.4301 |
| **Pressure Flow Temp** | 0,4 l/s |
| **Size** | 100×100 mm |
| **Version** | With tile frame |

| | |
|---|---|
| **RSK Number** | 7138445 |
| **Dimension** | Ø50 mm |
| **Floor Construction** | Tile flooring with clamping frame |
| **Floor Covering** | Tiles |
| **Function** | Bottom outlet |
| **Item Color** | White |
| **Material** | PP, Stainless steel 1.4301 |
| **Pressure Flow Temp** | 0,4 l/s |
| **Size** | 100×100 mm |
| **Version** | With tile frame |


Ø150
97
53
Ø50
Ø100